



9390 S. 300 W., Sandy, UT 84070
Phone: (801) 352-9800

RETURN BY FAX TO CMI:


801-433-9300

ATTENTION CMI REP: _____ TOTAL PAGES: _____
PRICE NEEDED BY: ASAP 1 2 DAYS (PLEASE CIRCLE)

REQUEST FOR QUOTATION

Customer: _____ Job Name: _____
 Address: _____ Address (see note): _____
 City/State/Zip: _____ City/State/Zip: _____
 Phone: _____ Contact: _____
 Fax Phone: _____ Est. Delivery Date _____

(City, State, & Zip are required for freight quoting purposes)

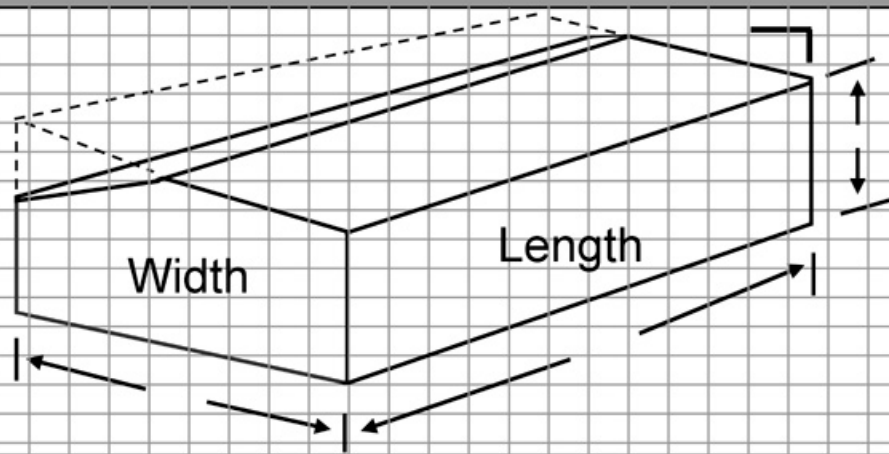

Please fill in the building dimensions above with approximate door placement and complete the table(s) shown below.

Building Dimensions			Insulation Requirements													
Width: <i>(Gable End)</i>			Roof			Walls										
Length:			Thickness	3"	3.5"	4"	6"	8"	9"	Thickness	3"	3.5"	4"	6"	8"	9"
Eave Height:	<i>If Single Slope-</i>		With Facing													
	Low:		3"			3.5"			4"			6"				
	High:		Unfaced													
Pitch:	(:12)		Facing	WMP-VR	WMP-10		Facing	WMP-VR	WMP-10							
Single/Double Slope:				WMP-50	Other			WMP-50	Other							
Split @ ridge (y/n)			Tabs	2 @ 3"	1 @ 6"		Tabs	2 @ 3"	1 @ 6"							
				Wide Tabs	Sticky (w/ tape)			Wide Tabs	Sticky (w/ tape)							
Deductions:			Tape	2-Way	Patch		Tape	2-Way	Patch							
<i>(Overhead Doors / Common Walls)</i>				Booger	Other			Booger	Other							

NOTES: